

CHROMAZONE 6/12 XLR6(X3)TM RM



GENERAL INFORMATION

ChromaZone12RMTM ChromaZone 19" Rack Mount 200W
ChromaZone12RMXLR6TM ChromaZone 19" Rack Mount 200W
ChromaZone6 RMX3TM ChromaZone 19" Rack Mount 300W
ChromaZone12RMX3TM ChromaZone 19" Rack Mount 600W

Pulsar's Chroma Lighting Fixtures - ChromaLightTM, ChromaDomeTM, ChromaFlushTM, ChromaStripTM, ChromaPanelTM, ChromaScapeTM, ChromaHeartTM, Low Profile ChromaHeartTM, etc., contain state of the art, high brightness, high efficiency Red, Green and Blue LEDs. These three primary colours can be mixed together to make an incredible pallet of 16.7 million colours.

Each ChromaFixtureTM requires a +24VDC supply up to 520mA and three 0 to +10V control signals to control the level of Red, Green and Blue. These control signals and the low voltage powers are provided by either the (ChromaZone6/12RMXLR6(X3)) ChromaZone6RMX3TM, ChromaZone12RMTM, or the ChromaZone12RMX3TM Controller. These can drive up to 6 to 12 ChromaFixtures.

The ChromaZone6/12RMXLR6(X3) has numerous chases and effects built in making it possible to achieve fantastic effects without programming. These internal effects can be selected via the UIM (User Interface Module) located on the front panel of the unit in Stand Alone mode or from a controller using a digital DMX (Digital MultipleX) signal.

When receiving a signal the ChromaZone6/12RMXLR6(X3) can operate in 3, 6, 9, 10, 36, 42 or 46 Channel Modes. Please see the lid printing page for details of these Operating Modes, how to select them, Channel Listings, and further information.

Please see the ChromaFixtures Leaflet for details of the luminaries themselves.

NB - Patents applied for. Trade Marks, Copyright, Registered and Unregistered Design Rights apply on all Chroma Products.

CONNECTIONS

Mains Supply The ChromaZone6/12RMXLR6(X3) works correctly on any mains voltage from 100-277 VAC, 50-60Hz, (self Adjusting). Power consumption ranges shown below:

ChromaZone12RM & XLR6TM - from 10 Watts to 200 Watts depending on the number of fixtures connected and their output levels.

ChromaZone6RMX3TM - from 10 Watts to 300 Watts depending on the number of fixtures connected and their output levels.

ChromaZone12RMX3TM - from 10 Watts to 600 Watts depending on the number of fixtures connected and their output levels.

A mains cable is provided with a Locking IEC female connector attached. The other end of the cable should be fitted with a suitably approved and rated mains plug. Note: in some countries it is a requirement that such a plug be fitted by a qualified electrician.

Cable Colours
Green/Yellow = \perp Earth / Ground
Brown = Live / Phase / Hot
Blue = Neutral

WARNING - THIS APPLIANCE MUST BE EARTHED

For safety we recommend the use of a Residual Current Circuit Breaker. An RCCB MUST be used when powering e.g. ChromaFixtures in wet environments.

Electronics On/Off Switch with built in Indicator Neon.

DMX In/Thru 5 Pin XLR Connectors.

Digital Control Signals: Two 5 pin XLR connectors (in/thru) are provided. The pin connections of the sockets are:

DMX SIGNAL

Pin 1 = Screen / Chassis Earth

Pin 2 = Signal -

Pin 3 = Signal +

Pin 4 = no connection / thru

Pin 5 = LVS (male only)

Outputs 12(6), five pole, cage clamp WAGO connectors are provided on the back panel. Each connector provides the necessary power and signal to drive a ChromaFixture.

Wiring WAGO: Strip back the outer insulation and the insulation from the cores of the ChromaFlex to a suitable distance. Insert a flat blade screwdriver into the cage clamp connector and press it down to open the terminal. Insert the wire. Release the screwdriver. The spring loaded cage clamp holds the wire tightly ensuring a long term, reliable connection.

Outputs XLR6 12, six pole, XLR Female connectors are provided on the back panel. Each connector provides the necessary power and signal to drive a ChromaFixture.

Wiring XLR: Strip back the outer insulation and the insulation from the cores of the ChromaFlex to a suitable distance. Solder the wires in to the Male XLR plug (Pulsar part 4476) using the colour code below:

Pin No.	Function	ChromaFlex Colour
1	0V	Black
2	Red 0-10V	Red
3	Green 0-10V	Green
4	Blue 0-10V	Blue
5	+24VDC	White
6 (XLR6)	0V	Link to Black

The ChromaZone6/12RM(X3) has a comb bracket supplied which locates on the back of the unit using the two M6 spring loaded fasteners. This ensures the cage clamp connectors cannot become accidentally pulled from their sockets.

The ChromaZone6/12RMXLR6(X3) may also be truss mounted using the M10 nutserts fitted to the base. Ensure you do not over tighten the fixings in to the tray.

The ChromaZone6/12RMXLR6(X3) may be wall or ceiling mounted using the mounting brackets supplied. These can be fitted to the underside of the unit using the 6 x M4 fixings supplied.

Two WAGO Connectors are supplied with many of the ChromaFixtures. Extra ChromaFlex cable is available from Pulsar if required.

It is recommended that the maximum run of ChromaFlex between the ChromaZone6/12RMXLR6(X3) and the ChromaFixture is 20m.

PULSAR


CHROMARANGE CHROMAZONE

CZ6 & CZ12RMXLR6(X3) MOUNTING

The **CZ6/12RMXLR6(X3)** may be wall or ceiling mounted using the 2 x mounting plates which are supplied and are located on the underside of the tray.

Remove the 4 x M4 countersunk posipan screws, rotate the fixing brackets 180 deg and re-fix to the tray using the same screws. Avoid over tightening the screws when re-locating them into the tray.

The image shows the **CZ6/12RMXLR6(X3)** fixing brackets with their dimensions as if they are fitted to the respective tray.

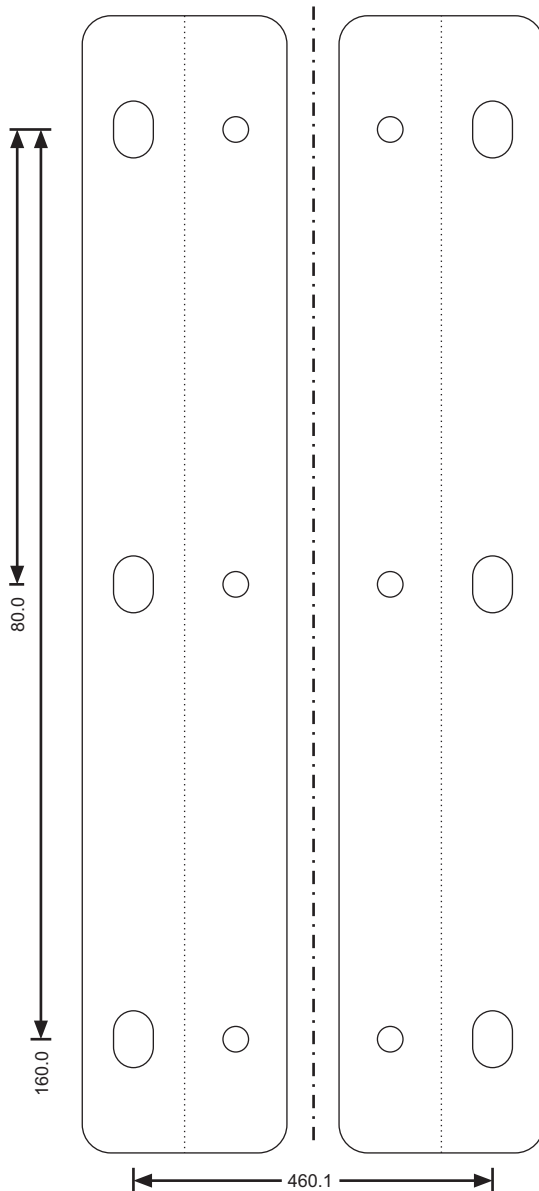

FUSES AND PRECAUTIONS

Failure of the ChromaZone6/12RM XLR6(X3) internal Power supply 6.3A HRC 5x20mm fuse indicates an internal fault requiring servicing by a qualified engineer.

Each 24VDC output is protected by an internal, resettable solid state fuse. Switch off the unit, fix the fault and switch on again to reset the fuse.

The 0-10V signal inputs and outputs are protected against shorts to 24V, 0V and static damage.

The PMX/DMX connections (input and thru) are protected against inadvertent shorts to 240Vac and static damage.

OTHER INFORMATION

PORTABLE APPLIANCE TESTING Both the **Pulsar ChromaZone12RM(XLR6)™**, **ChromaZone6RMX3™** and the **ChromaZoneRMX3™** may be safely Earth Bond and Insulation Tested.

STANDARDS - The **Pulsar ChromaZone12RM(XLR6)™**, **ChromaZone6RMX3™** and the **ChromaZone12RMX3™** complies with the following International and National Standards:

Electrical Safety - IEC65, EN60065, BS415

EMC - EN50081-1, EN55022, EN50082-1

Index of Protection IP20



Marking Directive 93/68/EEC - The **Pulsar ChromaZones** meets both the EMC directive 2004/108/EC and the Low Voltage Directive 2006/95/EC.

GUARANTEE - three years from the date of original purchase. The guarantee covers defects in manufacturing workmanship and materials. It is limited to parts and labour. The guarantee becomes void if the product is: a) misused, b) not used in accordance with the instructions, c) the cable connections are not made according to our instructions if the unit is used in damp or wet environments, d) repairs are made by unauthorised persons, e) the serial number label has been removed or defaced. Pulsar's maximum liability shall not exceed the price paid for the product. In the unlikely event of a fault occurring, do not use without repair. Return the product, with a description of the fault, to your supplier or direct to Pulsar for immediate attention.

DIMENSIONS AND WEIGHTS

Code	Description	Width	Height	Depth	Weight
		mm	mm	mm	kg
24500RM	ChromaZone12-200 RM	482.6	88.0	240.0	3.5
CZ12-200RMXLR6	ChromaZone12RMXLR6	482.6	88.0	240.0	4.6
24500RMX3	ChromaZone12RMX3	482.6	88.0	240.0	4.5
24550RMX3	ChromaZone6RMX3	482.6	88.0	240.0	4.5

CHROMARANGE CHROMAZONE

USER INTERFACE MODULE AND FUNCTIONS

LCD DISPLAY: A 2 line, 16 character per line, LCD display is used to set up, and indicate the status of the product. At switch on, the display shows:

DMX Address: n (where n=1 to 512)
Receiving: NO SIGNAL or DMX or PMX or ERROR

Press the (Up) or (Down) keys to cycle through the Menu Options (see *LCD Display Sheet*).

Press the **X** key on the **UIM** to change the settings.

Note: Program Mode self cancels after ~30 seconds if no keys have been pressed.

Note: if, at any time, the display shows **Receiving: ERROR**, then there is a problem with the DMX signal. It could be wiring, termination or poorly implemented DMX.

DMX Address: depending on the operating mode, a block of 3, 6, 9, 10, 36, 42 or 46 channels is received from the DMX signal see *Channel Assignments Tables*. The **DMX Address** is the number of the first channel in the block.

To set the required **DMX Address**, press the or keys on the **UIM** until the display shows **DMX Address:**

Press the **X (change)** key on the **UIM**, then set the start address using the or keys. These keys repeat if held down.

When the required **DMX Address** number shows in the display, press the **(Yes)** key to save changes or **X (Back)** key to restore the previous settings.

Note: the **Receiving:** text (NO SIGNAL / PMX / DMX / ERROR) in the display is for information only.

ChromaZone Mode: The options are 3, 6, 9, 10, 36, 42 and 46 channel modes see *Channel Assignments Tables*.

To set the required **Mode**, press the or keys on the **UIM** until the display shows **ChromaZone Mode:**

Press the **X (change)** key on the **UIM**, then select the required mode using the or keys.

When the required **ChromaZone Mode** shows in the display, press the **(Yes)** key to save changes or **X (Back)** key to restore the previous settings.

Channels per Fixture: the CZ12 uses 36 channels per fixture and the CZ6 uses 18 channels per fixture.

To view the number of **Channels per Fixture**, press the or keys on the **UIM** until the display shows **Channels per fixture**.

Pressing the **X (change)** key on the **UIM**, followed by the or keys will have no effect.

Press the **(Yes)** key to save changes or **X (Back)** key to return to the previous menu.

Fixture number: 36 divided by the **Channels per fixture** (shown above) gives the number of fixtures available from the data block.

A CZ12 can only be 1 of 1 fixture.

A CZ6 may therefore be either 1 (or 2) of 2 fixtures.

To set the required **Fixture number**, press the or keys on the **UIM** until the display shows **Fixture number**.

Press the **X (change)** key on the **UIM**, then select the required number using the or keys.

When the required **Fixture number** shows in the display, press the **(Yes)** key to save changes or **X (Back)** key to restore the previous settings.

Chase patterns: may be **6 or 12 way**.

To set the required **chase patterns**, press the or keys on the **UIM** until the display shows **Chase patterns:**

Press the **X (change)** key on the **UIM**, then select **6 or 12 way** using the or keys.

When the required **chase pattern way number** shows in the display, press the **(Yes)** key to save changes or **X (Back)** key to restore the previous settings.

USER INTERFACE MODULE AND FUNCTIONS

Channel 10: may be set as a Grand Master for the 36 RGB channels only, OR as a Global Grand Master for the 36 RGB channels, the ALL Red, Green and Blue, and the Chase Levels. To set the required **Ch.10** mode of operation, press the or keys on the **UIM** until the display shows **Ch.10...**

Press the **X (change)** key on the **UIM**, then select the required number using the or keys.

When the required **Ch.10** operation shows in the display, press the **(Yes)** key to save changes or **X (Back)** key to restore the previous settings.

Input Smoothing: ON or OFF. To disable the input smoothing, e.g. for fast response to video graphics signals, set to **OFF**

To turn the **Input Smoothing ON/OFF**, press the or keys on the **UIM** until the display shows **Input Smoothing:**

Press the **X (change)** key on the **UIM**, then select the required state using the or keys.

When the required state shows in the display, press the **(Yes)** key to save changes or **X (Back)** key to restore the previous settings.

Low Voltage Supply - ON or OFF. To connect the LVS to pin 5 of the MALE XLR, set to **ON**.

The LVS is used to power some PULSAR controllers, e.g. Outstation OS1. 24V at up to 250mA d.c. is available.

To turn the **Low Voltage Supply ON/OFF**, press the or keys on the **UIM** until the display shows **Low Voltage Supply is:**

Press the **X (change)** key on the **UIM**, then select the required state using the or keys.

When the required state shows in the display, press the **(Yes)** key to save changes or **X (Back)** key to restore the previous settings.

DMX Line Termination ON or OFF, set the last unit in the DMX cable run to ON, all others to OFF. Errors can often occur if the DMX line is not terminated. DMX errors are shown in the display as:

DMX Address: n
Receiving: ERROR

To turn the **DMX Line Termination ON/OFF**, press the or keys on the **UIM** until the display shows **DMX Line Termination:** Press the **X (change)** key on the **UIM**, then select the required state using the or keys.

When the required state shows in the display, press the **(Yes)** key to save changes or **X (Back)** key to restore the previous settings.

If No Signal use: In the event the **ChromaZone6/12™** is not receiving a DMX signal (e.g. controller no longer present), the unit may either use the user-programmable Stand Alone Settings (see **Stand Alone Settings View/Change** below) OR continue to use the Last DMX Packet received.

To select the **If NoSignal use:** requirement, press the or keys on the **UIM** until the display shows **If NoSignal use** Press the **X (change)** key on the **UIM**, then select the requirement using the or keys.

When your requirement is showing in the display, press the **(Yes)** key to save changes or **X (Back)** key to restore the previous settings.

CHROMARANGE CHROMAZONE

USER INTERFACE MODULE AND FUNCTIONS

Stand Alone Settings View/Change

There are three possibilities depending on:

- Whether there is an input signal and
- Whether "If NoSignal use:" is set to "Stand Alone Mode" or set to "Last DMX Packet".

1. No Signal + Use Stand Alone Mode:

The current Stand Alone Settings may be viewed, changed and saved as the new Stand Alone Settings.

2. No Signal + Use Last DMX Packet:

The channel levels of the Last DMX Packet (if any) may be viewed, changed and saved as the new Stand Alone Settings.

3. Signal present:

The incoming signal overwrites any changes made but these incoming channel levels may be set at the controller, viewed and saved as the new Stand Alone Settings.

To View/Change the Stand Alone Settings, press the or keys on the **UIM** until the display shows **Stand Alone Settings View/Change**.

Press the **X (change)** key on the **UIM**, then select the channel to view/change using the or keys. These keys repeat if held down. When the channel to be viewed/changed is showing in the display, press the or keys to change the value. These keys repeat if held down. The display shows both the bit number (0-255) and percentage (0-100%).

Please see the **Chase Select Table** when modifying chases.

To modify further channels, select the channel to view/change using the or repeat keys, pressing the or repeat keys to change the value.

When you have finished modifying channels, press the **(Yes)** key to save changes or **X (Back)** key to restore the previous settings.

VIEW(Sig)/SET(NoSig) Chan Levels

To View the Channel Levels/Change the Stand Alone Settings, press the or keys on the **UIM** until the display shows **VIEW (Sig)/SET(NoSig) Chan Levels**

Press the **X (change)** key on the **UIM**, then select the channel to change/view using the or keys. These keys repeat if held down.

When the channel to be changed/viewed is showing in the display, press the or keys to change the value. These keys repeat if held down. The display shows both percentage (0-100%) and bit number (0-255), and for channels 4 (Chase 1 Select) and 7 (Chase 2 Select) the chases selected.

Please see the **Chase Select Table** when modifying chases.

Notes:

this menu item is for this session use only, data is never saved.

the values can only be changed if the unit is not receiving data.

pressing the **X** or keys returns to the main menu.

Restore Factory Default Settings

To restore the factory default settings, press the or keys on the **UIM** until the display shows **Restore Factory Default Settings**.

Press the **X (change)** key on the **UIM**, then press the **(Yes)** key to restore defaults or **X (Back)** key to exit.

The factory default settings are:

DMX Address	1
ChromaZone Mode	46 Channel
Channels per Fixture	3
Fixture number	1
Chase patterns	6 Way
Channel 10	Grand Master for the 36 RGBs only
Input Smoothing	ON
Low Voltage Supply	ON
DMX Line Termination	OFF
If No Signal use:	Stand Alone Mode
Stand Alone Settings	Ch.1 - 3 = 0 bits / 0%
	Ch.4 = Chase 1 Select = Auto Chase
	Ch.5 = Chase 1 Speed = 128 bits / 50%
	Ch.6 = Chase 1 Level = 255 bits 100%
	Ch.7 46 = 0 bits / 0%

CHROMAZONE Menu Selection Overview

Display	Operation	Display	Choices	Operation
DMX Address: Receiving: t	X=Change X=Restore	DMX Address n X=Back =Yes	$n=1$ to 512 $t = \text{DMX} / \text{PMX} / \text{NO SIG} / \text{ERROR}$	=Save
ChromaZone Mode: nn Channels	X=Change X=Restore	CZ Mode nn Chan. X=Back =Yes	3 6 9 10 18 24 28 3 6 9 10 36 42 46	=Save
Channels per Fixture: 3				
Fixture number: 1 of 12				
Chase patterns: n Way	X=Change X=Restore	n Way Patterns X=Back =Yes	6 Way 12 Way	=Save
Ch.10	X=Change X=Restore	X=Back =Yes	CH10 = 18xRGB GM CH10 = 36xRGB GM CH10 = Global GM	=Save
Input Smoothing: t	X=Change X=Restore	IP Smoothing t X=Back =Yes	ON=Gentle, Smooth OFF=Fast, Video	=Save
Low Voltage Supply is: t	X=Change X=Restore	LV Supply is X=Back =Yes	ON OFF	=Save
DMX Line Termination: t	X=Change X=Restore	Line Term is t X=Back =Yes	ON OFF	=Save
If NoSignal use: t	X=Change X=Restore	t X=Back =Yes	Stand Alone Mode Last DMX Packet	=Save
Stand Alone Sett ings View/Change	X=Change X=Restore	Bits: %	Channel Assignments Tables and Chase Select Table	=Save
VIEW (Sig) /SET (No Sig) Chan Levels	X=View X=Back	Bits: %	Channel Assignments Tables and Chase Select Table	X = Back = Back
Restore Factory Default Settings	X=View	Restore Defaults X=Back =Yes	=Restore	
Pulsar Light of Cambridge Ltd UK		Information only		
www. pulsarlight.com		Information only		
MainSoftware N.n (C) Pulsar ddmmyy		Information only		
UIM Software N.n (C) Pulsar ddmmyy		Information only		
Inside air units now xxx was yyy		Information only Used by software		
to view X to change		Information only		

CHROMAZONE Software Version 4.0

Pulsar ChromaZone6/12(NP) / ChromaZone6/12RMX3 / ChromaBank / ChromaFlood / ChromaBatten Software Version No. 4.0 (MAIN micro 4.0 04-12-07 + UIM micro 1.0 07-03-05) has many exciting features. Two built in Chases allowing superimposition of effects and cross fading between chases. Chase 1 and 2 use the same table of 31 chases but there are differences to give you more choice - Chase 1 uses the ALL Red, Green and Blue Channels, 1,2 & 3, to change the colour of some chases (see table) while Chase 2 stays white and uses them to give a background colour. The chases have a very wide range of speeds.

•7 operating modes: 3,6,9,10,36,42 and 46 Channel Modes.

•A Master Dimmer Channel (Ch.10) for the 36 individual RGB channels, which may become a Global Grand Master for the All R/G/B and Chases Levels too.

•Input Smoothing may be disabled for fast display of video graphics and video frame rate capability.

•Please see the Channel Assignments Table page for details of the Operating Modes and how to select them, Channel Listings, and further information.

Chase No.	% Input	Bit No.	Chase Description	Notes
15	100	255	Auto Chase	
	95	244	Green Yellow Red Bar Graph Reverse	Use Channel 1
	92	236	Green Yellow Red Bar Graph Forward	Use Channel 1
14	89	228	Rainbow Strobe	
13	86	220	White / Any Colour Strobe	Channels 1,2 & 3 set colour
	83	212	White / Any Colour Crossover	Channels 1,2 & 3 set colour
12	80	204	Blue-Yellow Wave Reverse	
	77	196	Blue-Yellow Wave Forward	
	73	188	Green-Magenta Wave Reverse	
11	70	180	Green-Magenta Wave Forward	
	67	172	Red-Cyan / AnyCol/Op Colour Wave Forward	Channels 1,2 & 3 set colour All 3 at 0% = Red-Cyan
10	64	164	Red-Cyan / AnyCol/Op Colour Wave Reverse	
9	61	156	Black-White / AnyColour Wave Forward	Channels 1,2 & 3 set colour All 3 at 0% = White
	58	148	Black-White / AnyColour Wave Reverse	
8	55	140	Random Cols. Chase 1 Crossfade, Chase 2 Snap	
	52	132	Rainbow 2 Crossfade Forward	Wider primary colours to compensate for extra diffusion
	48	124	Rainbow 2 Crossfade Reverse	
7	45	116	Rainbow Crossfade Forward	Equal width primary & secondary colours
6	42	108	Rainbow Crossfade Reverse	
	39	100	"Follow 3" 18 Contrasting Colours Reverse	
5	36	92	"Follow 3" 18 Contrasting Colours Forward	
	33	84	18 Crossfading Colours Reverse	
4	30	76	18 Crossfading Colours Forward	
	27	68	White/AnyColour/AutoColour Cascade Reverse	Channels 1,2 & 3 set colour All 3 at 0% = White.
	23	60	White/AnyColour/AutoColour Cascade Forward	All 3 at 100% = Auto Colour Change
3	20	52	6 Crossfading Pastel Colours	
	17	44	Colour Wipes	
2	14	36	6 Crossfading Colours	
1	11	28	6 Separate Colours	
	8	20	Red Green Blue Bar Graphs Reverse	Use Channels 1,2 & 3
	5	12	Red Green Blue Bar Graphs Forward	Use Channels 1,2 & 3
0	0	0	No Chase	

CHROMAZONE Channel Assignment Tables

(3) 6 Channel Mode	
1	All Red
2	All Green
3	All Blue
4	Chase Select (see Chase Table)
5	Chase Speed
6	Chase Level

(9) 10 Channel Mode	
1	All Red
2	All Green
3	All Blue
4	Chase 1 Select (see Chase Table)
5	Chase 1 Speed
6	Chase 1 Level
7	Chase 2 Select (see Chase Table)
8	Chase 2 Speed
9	Chase 2 Level
10	Global Grand Master

36 Channel Mode		
ChromaZone 6		ChromaZone 12
Fixture 1 of 2	Fixture 2 of 2	
1 Red 1 2 Green 1 3 Blue 1 ↓ 16 Red 6 17 Green 6 18 Blue 6	19 Red 1 20 Green 1 21 Blue 1 ↓ 34 Red 6 35 Green 6 36 Blue 6	1 Fixture 1 Red 1 2 Fixture 1 Green 1 3 Fixture 1 Blue 1 ↓ 34 Fixture 1 Red 12 35 Fixture 1 Green 12 36 Fixture 1 Blue 12


42 Channel Mode		
ChromaZone 6		ChromaZone 12
Fixture 1 of 2	Fixture 2 of 2	
1-6 as 6 Channel Mode 7 Red 1 8 Green 1 9 Blue 1 ↓ 22 Red 6 23 Green 6 24 Blue 6	1-6 as 6 Channel Mode 25 Red 1 26 Green 1 27 Blue 1 ↓ 40 Red 6 41 Green 6 42 Blue 6	1-6 as 6 Channel Mode 7 Fixture 1 Red 1 8 Fixture 1 Green 1 9 Fixture 1 Blue 1 ↓ 40 Fixture 1 Red 12 41 Fixture 1 Green 12 42 Fixture 1 Blue 12

46 Channel Mode		
ChromaZone 6		ChromaZone 12
Fixture 1 of 2	Fixture 2 of 2	
1-9 as 9 Channel Mode 10 36 x RGB Grand Master OR Global Grand Master ↓ 11 Red 1 12 Green 1 13 Blue 1 ↓ 26 Red 6 27 Green 6 28 Blue 6	1-9 as 9 Channel Mode 10 36 x RGB Grand Master OR Global Grand Master ↓ 29 Red 1 30 Green 1 31 Blue 1 ↓ 44 Red 6 45 Green 6 46 Blue 6	1-9 as 9 Channel Mode 10 36 x RGB Grand Master OR Global Grand Master ↓ 11 Fixture 1 Red 1 12 Fixture 1 Green 1 13 Fixture 1 Blue 1 ↓ 44 Fixture 1 Red 12 45 Fixture 1 Green 12 46 Fixture 1 Blue 12

IMPORTANT SAFETY INSTRUCTIONS

Read the Product Instruction Leaflet and this Safety Instructions Leaflet before attempting to install or operate this apparatus.

Keep this leaflet and the Product Instruction Leaflet for future reference.

Observe ALL warnings indicated by the symbol,  both in the Product Instruction Leaflet and on the apparatus.

Follow ALL instructions given in the Product Instruction and this Safety Leaflet. Failure to do so may result in serious injury or death.

Protect the power cord from being walked on or pinched, particularly at plugs, auxiliary outputs, and the point where they exit from the apparatus.

Only use attachments/accessories specified by the manufacturer (Pulsar Light of Cambridge Ltd. UK).

Use only with the stand/bracket or other mounting arrangement specified in the Product Instruction Leaflet. In case of doubt, consult with the manufacturer (Pulsar Light of Cambridge Ltd. UK).

Unplug this apparatus before lightning storms or when unused for long periods.

Refer all servicing to suitably qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power supply cord or plug damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.

Clean only with a DRY cloth.

Protect the apparatus from dripping and splashing.

DO NOT place objects containing liquids on the apparatus.

DO NOT use this apparatus near water or in a condensing atmosphere, unless explicitly stated in the Product Instruction Leaflet.

DO NOT block any of the ventilation openings. Install the apparatus as specified in the Instruction Leaflet.

DO NOT defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding-type plug has two blades and a third grounding prong. The wide blade or the third prong is for YOUR safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete unit.

Mains Supply Cable Colours

Green / Yellow = \equiv Earth / Ground

Brown = Live / Phase / Hot

Blue = Neutral / Grounded Conductor