

CHROMABATTEN 200

HIGH POWER ARCHITAINMENT LINEAR LED BATTEN



The ChromaBatten 200 is one of Pulsar's leading edge flagship Linear LED fixtures and ideal for exterior architectural installations and temporary events of all kinds.

Weather-sealed to IP66 and featuring a full array of custom options as well as flexible mount types, the ChromaBatten 100 can be specified to exactly meet your needs and exceed your expectations.

HIGH PERFORMANCE

4400+ lumen output

DURABLE AND RELIABLE

Weatherproof to IP66 with a 5 year unlimited-use guarantee

BUILT TO SPEC

Customisable to meet your exact requirements

WORLDWIDE COMPATIBILITY

Power supply input rated at 85-277 VAC at 50-60 Hz

KEY TECHNICAL DATA

200W Power	4400 Lumens	85 - 277V Voltage	66 IP Rating	DMX MSA Control	5 YEAR Guarantee
---------------	----------------	----------------------	-----------------	--------------------	---------------------

LED COLOUR OPTIONS

TriColour	TC + VW	Red	Green	Blue	UV
Variable White	Amber	2900K	4300K	6000K	MSA

PRODUCT BEAM ANGLES

10°	25°	45°	10° x 50°
-----	-----	-----	-----------


MOUNT OPTIONS

Surface	Surface	Surface	Bracket	Custom
---------	---------	---------	---------	--------



CHROMABATTEN 200

HIGH POWER ARCHITAINMENT LINEAR LED BATTEN

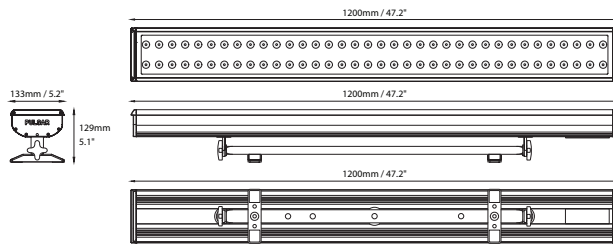

TECHNICAL SPECIFICATION

LIGHT	LED Type	TriColour	Var White	TC + VW	2900K	4300K	6000K	SC/UV
	Delivered output (lumens)	4400	6830*	5620*	5350*	6020*	8030*	4600*
	No. of LEDs	72						
	CRI	70+						
	LED Lifetime	100,000h dynamic colour						
ELECTRICAL	Power input	85 - 277 VAC @ 50 - 60Hz						
	Wattage	200W						
	Control	DMX or stand alone settings						
PHYSICAL	Dimensions (Length x Width x Height)	1200 x 132 x 132mm (47.2 x 5.2 x 5.2")						
	Weight	11kg (24.2lbs)						
	Material and finish	Corrosion resistant extruded aluminium powder coated in a standard or custom finish						
	Lens and front glass	Polycarbonate lenses and toughened front glass						
	Cables and connectors	2 x 5m** DMX with IP65 XLR5 connectors, 1 x 5m** Mains (connector specified on order)						
	Mount options	Supplied with bracket and feet for surface or truss mounting.						
	Temperature range	-20 - +45°C						
	Ingress protection	IP66						
	Environment	Dry conditions and damp or wet interior/exterior environments						

*Light output calculated from LED manufacturer data. **Mains and DMX Cables Available from 0.5m to 25m, optional Quicklink Connect available

PRODUCT CODES

CBAT200 **MSA** - **F** **B** **T** **PFM**

To generate product order codes, replace the bold characters above with the feature options from the table below.

MSA Mains Stand Alone	[blank] Standard Fixture; MSA Full on single colour fixture with no DMX control
F Finish	B Black; S Silver; W White; RAL#### Custom RAL colours available on request (please contact Pulsar for details)
B Beam Angle	10 10°; 25 25°; 45 45°; 10x50 10x50°; 90 90° (no lens)
T LED Type	TC TriColour; VW Variable White; TCVW TriColour + Variable White; WW 2900K White; NW 4300K White; CW 6000K White; UV UltraViolet; SC Single colour specified with order (please contact Pulsar for details)
PFM PFM	[blank] Standard Fixture; PFM No fixture User Interface Module (UIM), requires PFMOne for remote configuration

